


LCT-Load Covering Trailers Dome Roof Rolling Tarp System with Windmaster "Bullet" CFD Tested Aerodynamic Fairing provides load covering for Goose Neck Trailer requirements. At a standard side height of 66" with 24" arch to center (90" OAL Ht.) this model of system reduces wind drag more than a 72" high flat model system.

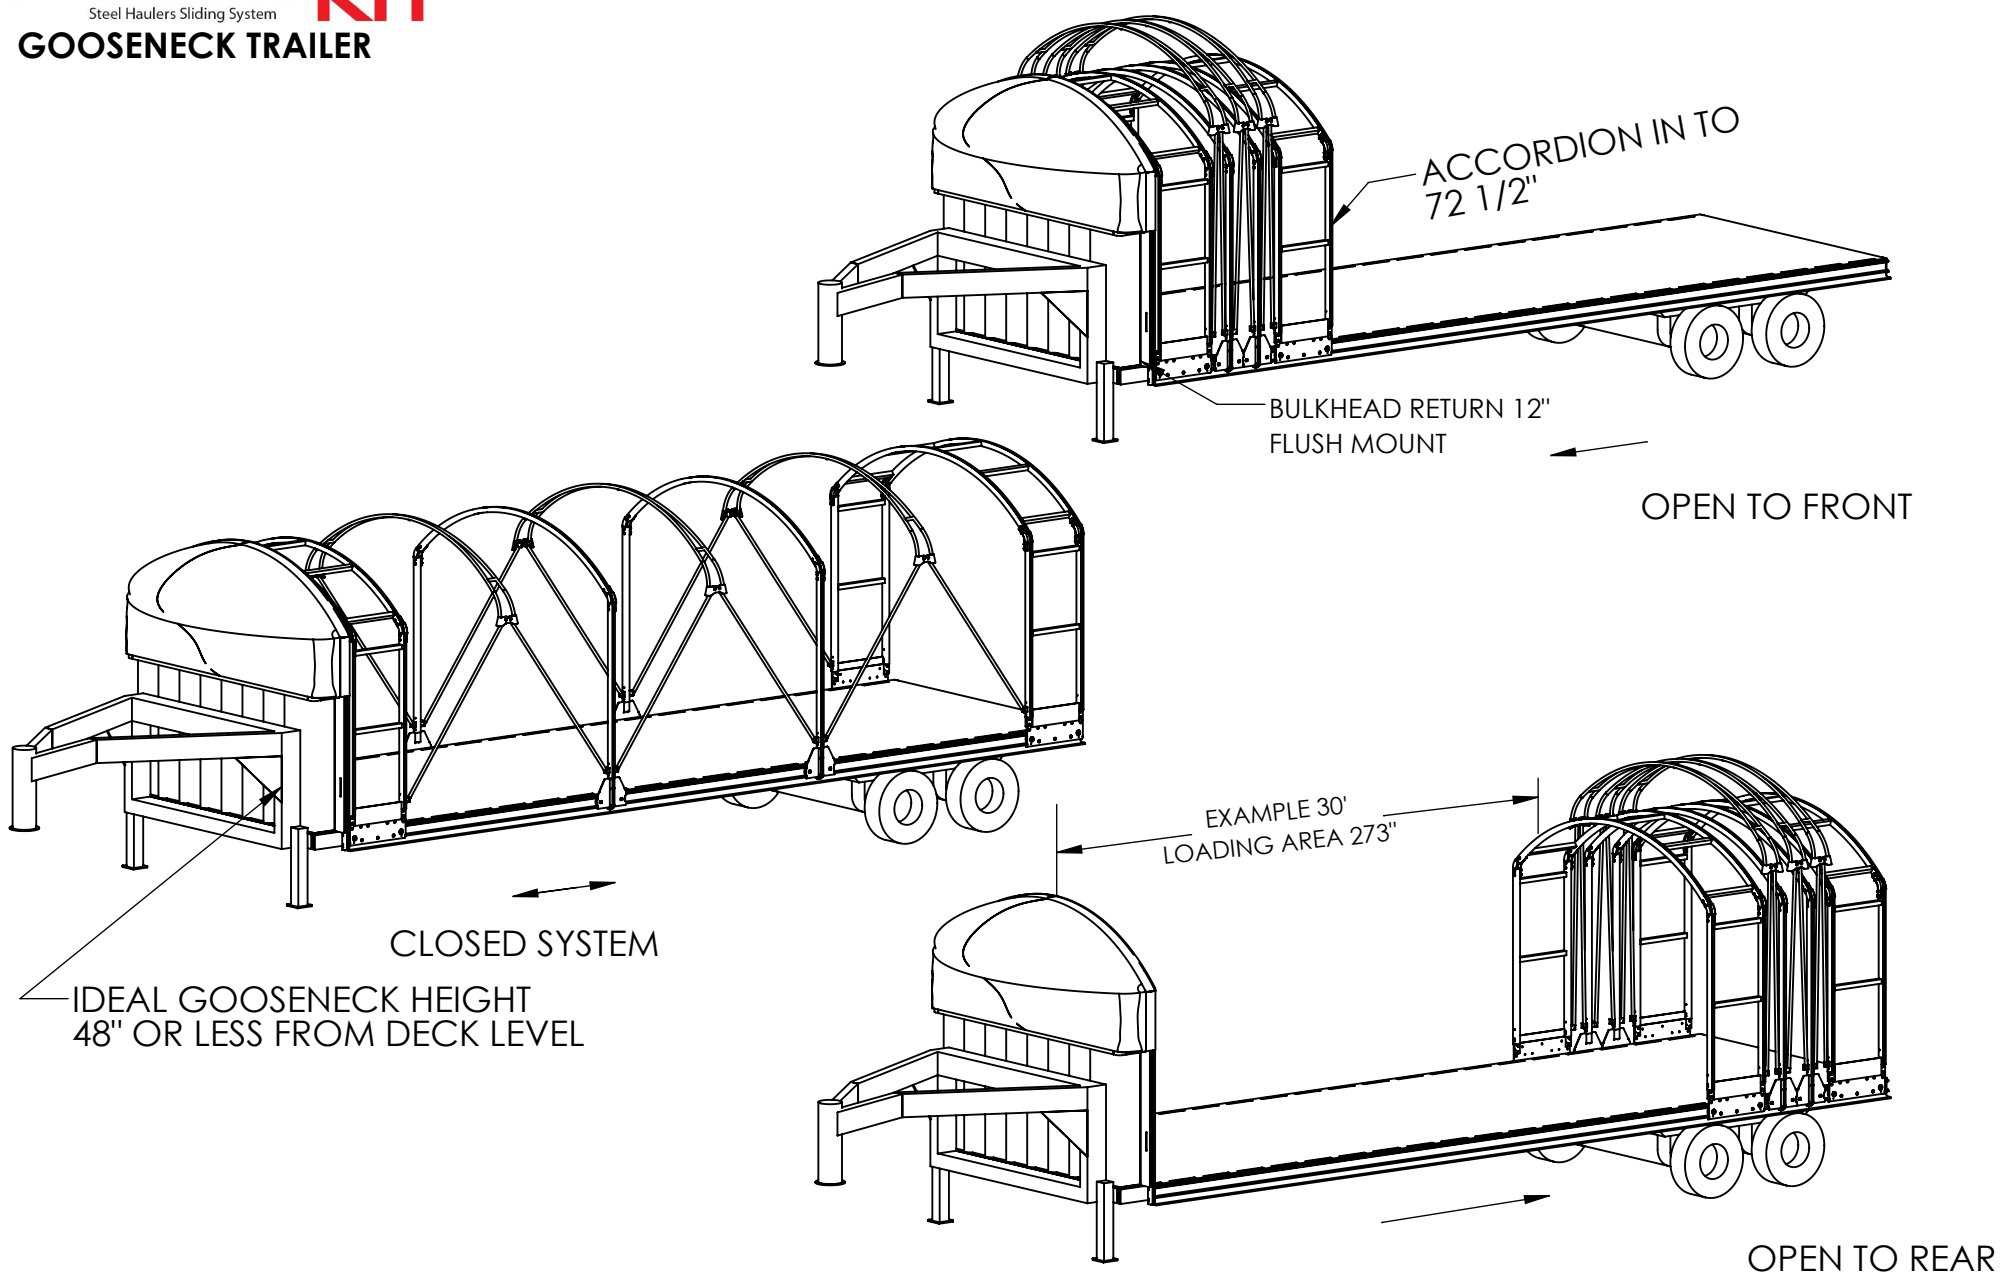

DRAWN BY	BALKARAN	COMMENTS: ALL UNITS ARE IN INCHES UNLESS OTHERWISE STATED
MODIFIED DATE	4/28/2017	
CREATED DATE	4/27/2017	
MATERIAL	-	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LOAD COVERING SOLUTIONS LTD. BURLINGTON, ON. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF LOAD COVERING SOLUTIONS LTD. BURLINGTON, ON IS PROHIBITED.
MTR-PRT #	-	
QUANTITY	-	
LOT SIZE	-	

TITLE:	22'-30' GOOSENECK TRAILER
LCS PART #	

REVISION #	1
SHEET FORMAT	A
SHEET SCALE	1:10
WEIGHT	0
PRICE	-
PAGE	2 OF 4

LOAD COVERING SOLUTIONS.
 1052 Clinton Street
 Buffalo, NY 14206
 Phone: 1-877-790-5665
 Fax: 1-877-345-5623
 USA



LOAD COVERING SOLUTIONS.
 5499 Harvester Road
 Burlington, ON L7L 5V4
 Toll Free: 1-(800) 465-8277
 Local: (905) 335-2012
 Canada

