


LCT-Load Covering Trailers Dome Roof Rolling Tarp System with Windmaster "Bullet" CFD Tested Aerodynamic Fairing provides load covering for Goose Neck Trailer requirements. At a standard side height of 66" with 24" arch to center (90" OAL Ht.) this model of system reduces wind drag more than a 72" high flat model system.

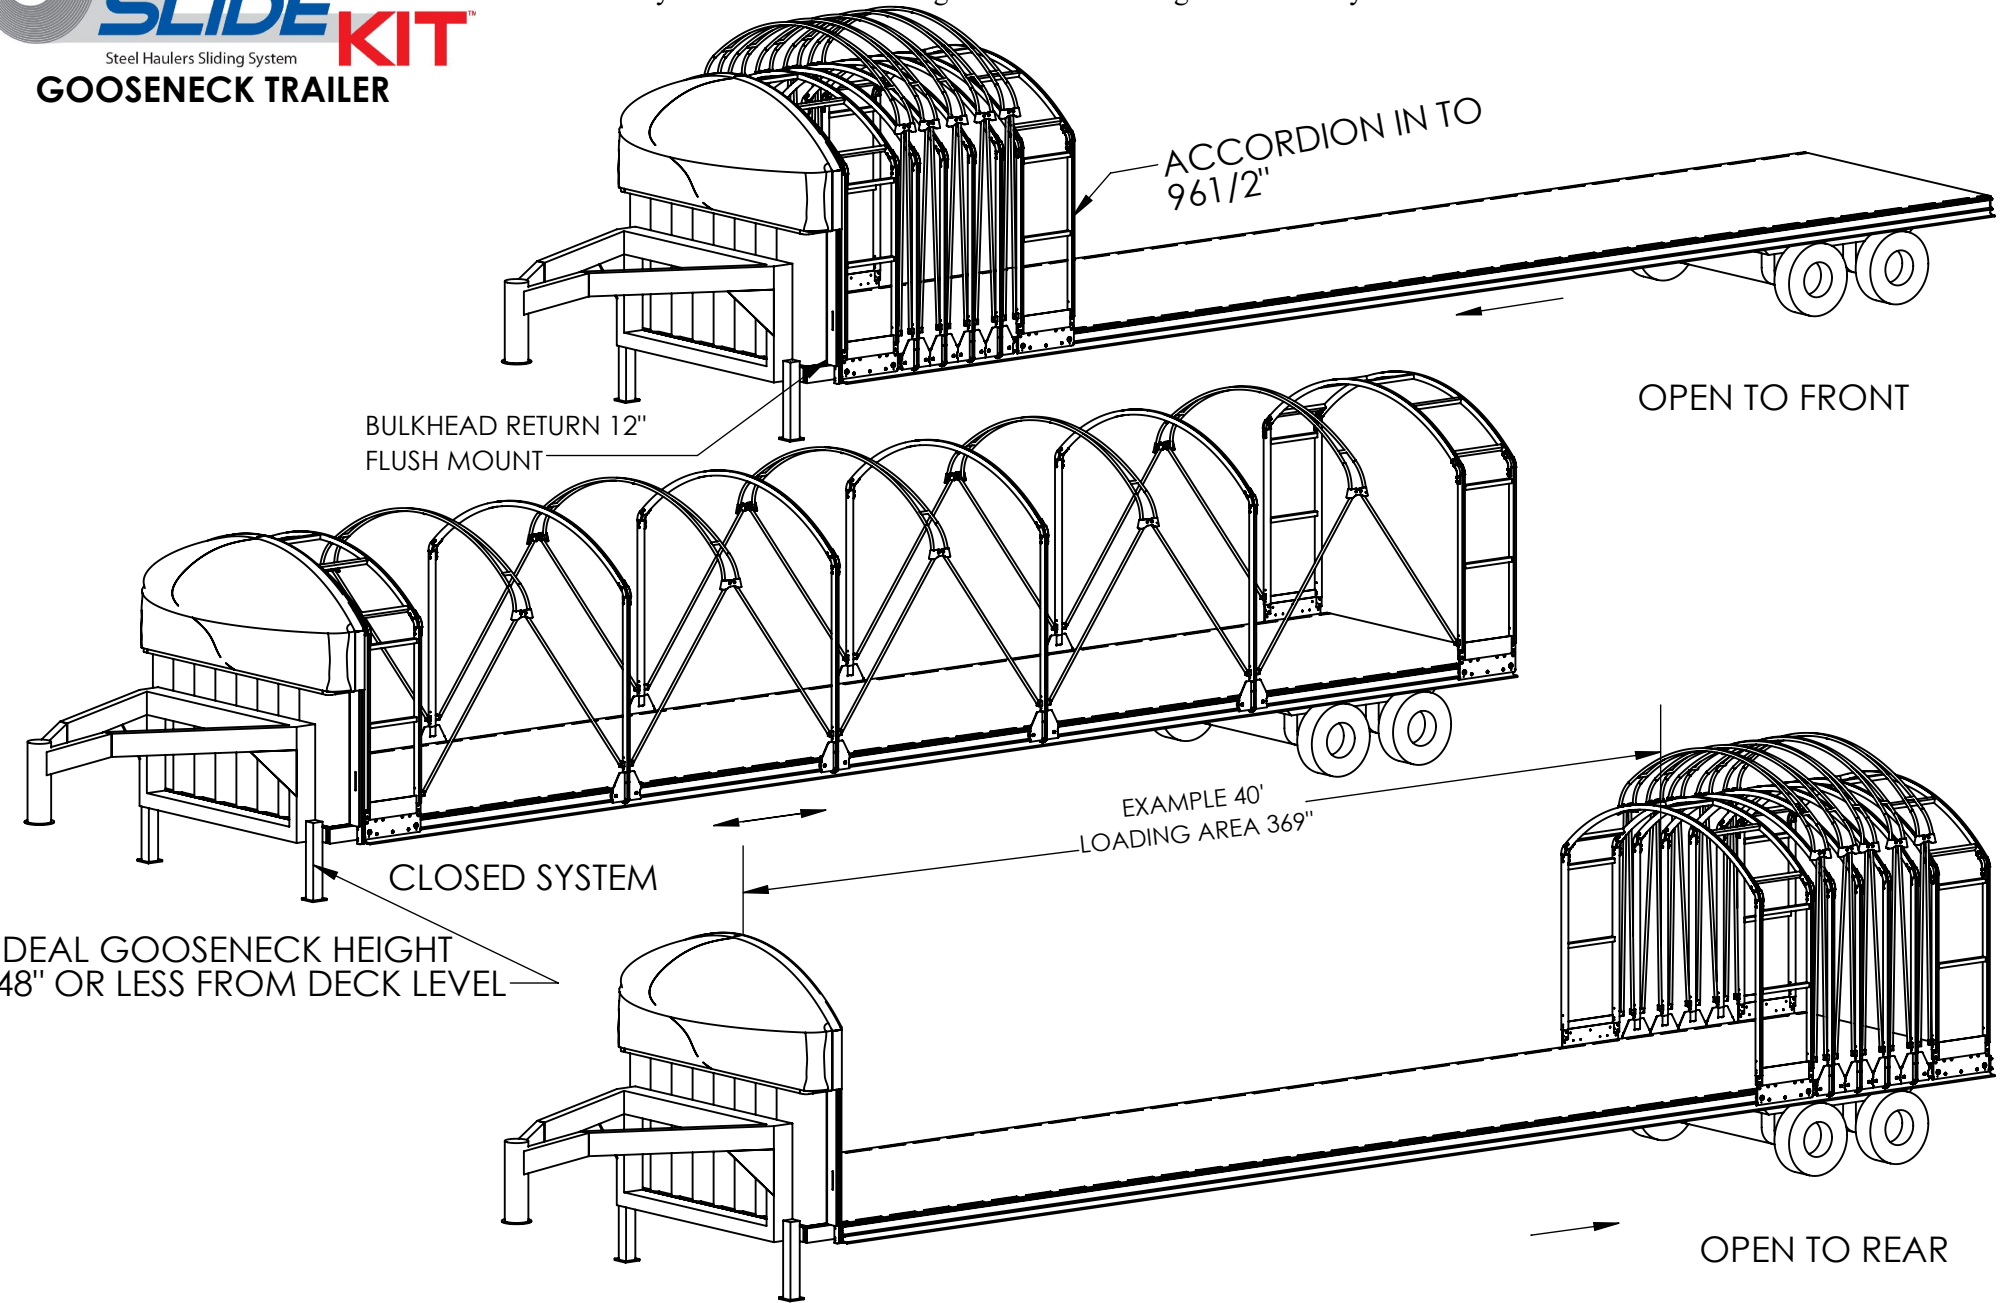

IDEAL GOOSENECK HEIGHT
48" OR LESS FROM DECK LEVEL

DRAWN BY	BALKARAN
MODIFIED DATE	4/28/2017
CREATED DATE	4/27/2017
MATERIAL	-
MTR-PRT #	-
QUANTITY	-
LOT SIZE	-

COMMENTS:	ALL UNITS ARE IN INCHES UNLESS OTHERWISE STATED
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LOAD COVERING SOLUTIONS LTD. BURLINGTON, ON. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF LOAD COVERING SOLUTIONS LTD. BURLINGTON, ON IS PROHIBITED.	

TITLE:	40' GOOSENECK TRAILER
LCS PART #	

REVISION #	1
SHEET FORMAT	A
SHEET SCALE	1:10
WEIGHT	0
PRICE	-
PAGE	4 OF 4

LOAD COVERING SOLUTIONS.
1052 Clinton Street
Buffalo, NY 14206
Phone: 1-877-790-5665
Fax: 1-877-345-5623
USA

LOAD COVERING SOLUTIONS.
5499 Harvester Road
Burlington, ON L7L 5V4
Toll Free: 1-(800) 465-8277
Local: (905) 335-2012
Canada

